

# Dusty Evo

Art. No.: 63 202



## Technical Data

Filter	
Filter stages	1
Filter method	Cleanable filter
Filter cleaning method	Manual
Filter surface	15 ft <sup>2</sup>
Type of filter	Filter cartridge
Filter material	ePTFE membrane
Filter efficiency	> 99.9 %
Dust classification	M
Basic data	
Extraction capacity	153 cfm
Max. fan performance	2 x 106 cfm
Maximum vacuum	73 inch WC
Fan performance	bool_false cfm
Weight	66 lbs
Motor power	2.28 hp
Power supply	1 x 115 V / 60 Hz
Rated current	16 A
Noise level	74 dB(A)
Additional information	
Fan type	Suction turbine
Hose connection	Ø 45 mm / Ø 63 mm
Capacity Dust collection container	bool_false gal

## Applications

- Low to medium levels of smoke and dust
- Occasional use
- Nozzles, funnel and torch extraction
- Repair work
- Alternating work places

## Benefits





- High extraction capacity due to two high performance turbines
- Best health protection for employees by use of KemTex® ePTFE filter cartridges with surface filtration
- Easy to transport on site or confined spaces due to rigid handle and recessed grips
- For mobile use due to light weight
- Optimal adjustment to the welding process with stepless speed control

## Properties

- Manual filter cleaning
- Cleaning indicator
- KemTex® ePTFE filter cartridge
- Portable and mobile
- Stepless speed control
- Dust collection tray, 6L

## Accessories

- Automatic start-stop
- Tool tray with cup holder
- Suction hose
- Slot nozzle
- Funnel nozzle
- Connector for welding torches

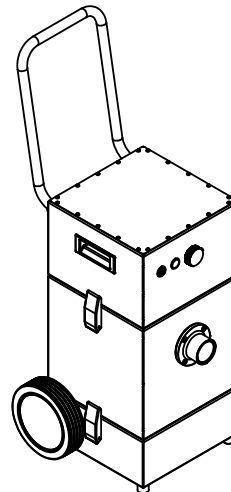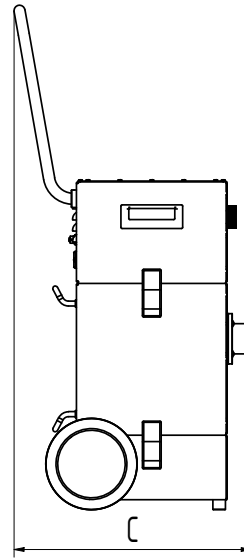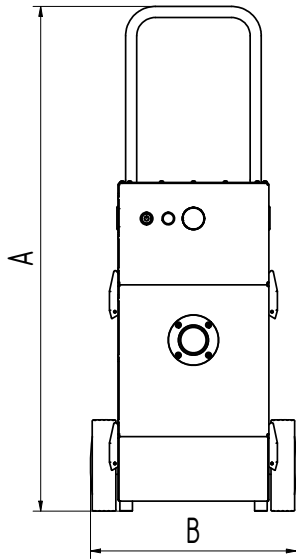

## Technical Data

### Dimensions

A	39.5 in
B	16.1 in
C	18.6 in
D	11.8 in
E	11.8 in